

# Safety Valves

## Type 06002 - gastight



**Cryogenic Safety Valves, angle type, brass, PN63, type tested TÜV-SV.1048. S/G**

Standard Safety Valve,  
gastight, closed bonnet  
with carbon filled PTFE valve seal  
Outlet: female thread Rc 3/8 acc. to ISO 7/1  
"cleaned and degreased for oxygen service"

**Part No. 06002.X.0020**

Inlet: male thread type R (BSPT) acc. to ISO 7/1

**Part No. 06002.X.2020**

Inlet: male thread type G (BSPP) acc. to ISO 228/1

**Part No. 06002.X.5020**

Inlet: male thread NPT acc. to ANSI B 1.20.1

Available options - on request only:


- with installed elbow at the outlet



**Applications:**

Provided as safety device for protection against thermal expansion in pipeworks and parts of facilities.  
Approved for air gases, vapours and cryogenic liquefied gases incl. LNG.  
Working temperature: -196°C / -321°F (77K) up to +150°C / +302°F (423K), suitable for horizontal installation

Materials	DIN EN	ASME/ASTM
1 Body	CW617N	EN12165 CW617N Code Case 1750
2 Valve seal	PTFE / Carbon filled (25%)	
3 Disc	CW452K	B 103 UNS C51900
4 Guide plate	CC493K	SB 505 C93200
5 Stem	CW614N	EN12164 CW614N Code Case 1750
6 Spring	1.4571	A 313 Grade 316Ti
7 Bonnet	CW614N	EN12164 CW614N Code Case 1750
8 Spring clamp	CW614N	EN12164 CW614N Code Case 1750
9 Thread ring	CW614N	EN12164 CW614N Code Case 1750
10 Cap	CW614N	EN12164 CW614N Code Case 1750

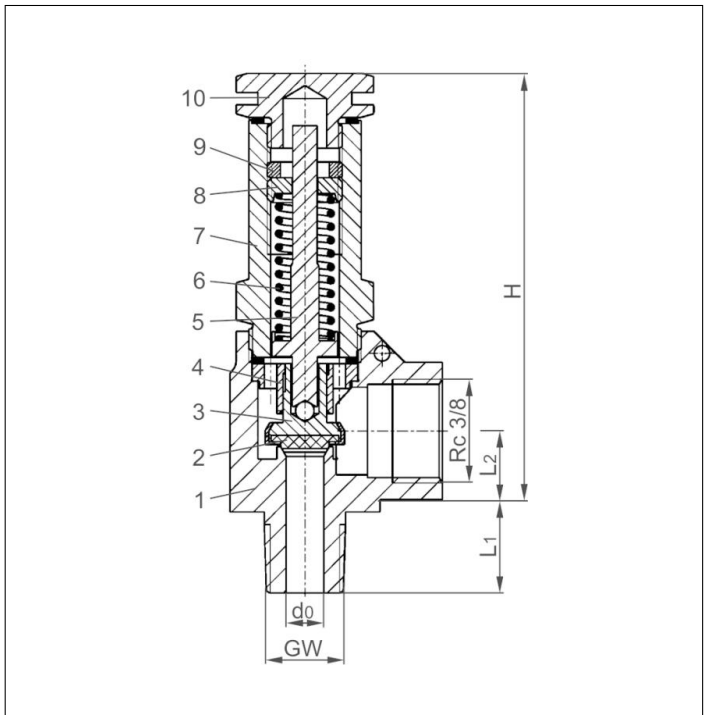

**Essential:** Valves are delivered at a set pressure, therefore when ordering please confirm set pressure, medium and temperature.

Standard marking acc. to Pressure Equipment Directive 2014/68/EU (PED).



Type 06002	Technical data			
Nominal size	GW	1/4	3/8	1/2
Orifice	d <sub>0</sub>	6.0	6.0	6.0
Dimension code	.X.	0200	0300	0400
Set pressure range	bar	1.0-55.0	1.0-55.0	1.0-55.0
Height	H	70	70	70
Length	L <sub>1</sub>	13	15	17
Length	L <sub>2</sub>	13	13	13
Weight	ca. kg	0.18	0.20	0.22
Coefficient of discharge	α <sub>w</sub>	0.34	0.34	0.34

Dimensions in mm.

# Safety Valves

## Type 06002 - gastight



### Discharge capacities

Calculation of flow rate acc. to AD2000-Merkblatt A2 / DIN EN ISO 4126-1

Medium:

**Air** in m<sup>3</sup>/h at 0°C and 1013.25 mbar

**The capacity indicated below is for a fully opened valve.**

$d_0$  - orifice

$A_0$  - flow area

Set pressure in bar (g)	GW	1/4, 3/8 & 1/2
	$d_0$ (mm)	6.0
	$A_0$ (mm <sup>2</sup> )	28.3
	Medium	<b>Air</b>
1.0		12.0
2.0		20.0
3.0		28.0
4.0		35.0
5.0		42.0
6.0		50.0
7.0		57.0
8.0		64.0
9.0		71.0
10.0		79.0
12.0		93.0
14.0		108.0
16.0		123.0
18.0		137.0
20.0		153.0
22.0		168.0
24.0		182.0
26.0		197.0
28.0		212.0
30.0		229.0
32.0		243.0
34.0		258.0
36.0		273.0
38.0		288.0
40.0		305.0
42.0		320.0
44.0		335.0
46.0		350.0
48.0		365.0
50.0		383.0
52.0		398.0
54.0		413.0
55.0		421.0